

TABLE OF CONTENTS



Biography	5	Brake Force and Corner Weight	37
Acknowledgments	5	Perfect Balance	38
Dedication	6	Static Weight Distribution	39
Foreword	6	The Second Law of Motion	39
Introduction	7	Dynamic Weight Distribution	40
Chapter 1: Energy Conversion	9	The Benefits of Perfect Balance	41
The Conservation of Energy	9	Front Brake Bias	43
Where Energy Comes From	10	Rear Brake Bias	43
Friction	10	Measuring Brake Balance	44
Kinetic Energy	11	Changing Brake Balance	44
Potential Energy	13	Chapter 5: Pedals, Boosters	
Energy Transformation	14	and Master Cylinders	46
Energy and the Brake System	14	Brake Pedal Components	46
Calculating Brake System Temperature	15	OEM Brake Pedals	47
Importance of Brake Sizing	15	Racing Brake Pedals	48
Chapter 2: Tires Stop the Car	18	Brake Boosters	48
The First Law of Motion	18	Vacuum Boosters	48
Brake Forces	18	Hydraulic Boosters	50
Tire Slip	19	Master Cylinders	50
How Brake Forces are Generated	20	Master Cylinder Selection	52
The Mu-Slip Curve	22	Rear Brake Pressure Reduction	54
Choosing the Best Tires	24	Balance Bars	54
Calculating Maximum Deceleration	25	Proportioning Valves	55
Chapter 3: Brake System Design	27	Chapter 6: Brake Fluid	58
Driver Applied Force	27	Brake Fluid 101	58
Brake System Overview	28	FMVSS116	58
Brake Corner Gain	33	Dry Boiling Point	60
Summing Forces	34	Wet Boiling Point	61
Overall Brake System Gain	34	Water Adsorption	61
Calculating Deceleration	34	DOT Ratings	61
Calculating Stopping Distance	34	Brake Fluid Compatibility	64
Brake System Modifications	35	Brake Fluid Maintenance	64
Chapter 4: Brake Balance	37	Brake Bleeding	65
		Chapter 7: Brake Lines and Hoses	69

TABLE OF CONTENTS



Hydraulic Circuit Design	69		
Brake Lines	70		
Flare Fittings	70		
Brake Hoses	71		
Banjo Fittings	72		
Stainless Steel Brake Hoses	73		
Chapter 8: Brake Calipers	76	Chapter 11: Sports Car Brake Upgrade	118
Hydraulic Gain	76	The Vehicle	119
Caliper Components	76	The Objective	119
Taper Wear	79	Picking the Right Parts	119
Piston Count	81	Bolting Them On	121
Caliper Mounting	82	The Results	124
One-Piece (Monoblock) Calipers	84		
Two-Piece Calipers	84	Chapter 12: Racecar Brake Upgrade	126
Knockback	84	The Vehicle	127
		The Objective	127
Chapter 9: Brake Pads	88	Front Brake Upgrade	127
Brake Pad Terminology	88	Rear Brake Upgrade	129
Coefficient of Friction	90	Apply System Upgrade	131
Coefficient of Friction Stability	91	Hoses, Fluids, and Pads	132
Brake Pad Fade	91	The Results	132
Friction Material Categories	92		
Friction Material Chemistries	93	Chapter 13: Muscle Car Brake Upgrade	133
Friction Mechanisms	96	The Vehicle	133
Brake System Break-In	97	The Objective	134
		Drum Brakes 101	134
Chapter 10: Brake Rotors	100	Picking The Right Parts	134
A Rotor Refresher	100	Bolting Them On	135
Rotor Terminology	101	Buttoning it Up	138
Effective Radius	103	The Results	138
Rotor Sizing	103		
Static Weight and Rotational Inertia	103	Chapter 14: Hot Rod Brake Upgrade	139
Rotor Cooling	104	The Vehicle	139
One-Piece (Fixed) Rotors	107	The Objective	139
Two-Piece (Floating) Rotors	107	Front Brake Upgrade	139
Solid Rotors	109	Brake Pedal Considerations	140
Vented Rotors	110	Master Cylinder Upgrade	142
Cross-Drilled Rotors	111	Brake Line and Proportioning	
Slotted Rotors	112	Valve Installation	142
Rotor Inspection	113	Brake Hoses	143
Thickness Variation	115	Brake Fluid Selection	143
		Parking Brake Installation	144
		The Results	144



BRAKE ROTORS

There's nothing that screams high-performance more than an oversized brake rotor sitting behind an open-spoke wheel wrapped in the widest rubber possible. No self-respecting automotive enthusiast would be satisfied with a 10-inch rotor tucked inside an 18-inch wheel. Bigger is always better, right?

Well, yes and no. There's much more to selecting the proper brake rotor than finding one that fits. Certainly the big-brake touring-car look is desirable, but selecting the wrong rotor can actually compromise overall brake system

performance. It's time to find out what it takes to get the best of both worlds.

A Rotor Refresher

Although discussed separately to this point, the rotor actually performs two functions in the brake system. First, the rotor acts as the primary heat sink during the conversion of kinetic energy to thermal energy. This is where a majority of the vehicle's kinetic energy ends up during a typical braking event, and back in Chapter 1 you learned to estimate the

temperature rise of the rotors by using the following equation:

$$\begin{aligned} \text{Rise in temperature (degrees F)} \\ &= \text{kinetic energy (ft-lb)} \div \\ &\text{weight of the brakes (lb)} \div \\ &77.8 \text{ (assuming cast iron)} \end{aligned}$$

The rotor's second function was covered in Chapter 3—it is also responsible for converting the brake pad friction force into wheel torque. Because the brake pad friction force occurs at a fixed distance from the center of the spinning



Although rotors are available in a variety of different shapes, sizes, and materials, they all share a common purpose—they must first absorb then dissipate a vehicle's kinetic energy during braking. While this rotor may be horribly undersized for a road racing application, it may fit the bill perfectly for a boulevard cruiser. (Randall Shafer)



During track use, rotors are squeezed with thousands of pounds of clamp force, twisted by thousands of foot-pounds of torque, and heated to over 1,200 degrees F. Heavy cars with large engines such as these only make the demands that much more intense. (Wayne Flynn/pdxsports.com)

BRAKE ROTORS

rotor, the resulting wheel torque was calculated as follows:

$$\text{Wheel torque (ft-lb)} = \frac{\text{brake pad friction force (lb)} \times [\text{rotor effective radius (in)}] \div 12 \text{ (a conversion factor)}}{1}$$

Although these tasks are quite different in nature, heat absorption and torque generation occur simultaneously. In a competitive environment, the rotor is continuously compressed with thousands of pounds of caliper clamp force, generating thousands of foot-pounds of wheel torque, all while sustaining operating temperatures well over 1,000 degrees F, lap after lap after lap. It's not easy being a rotor!

Rotor Terminology


Like other parts of the brake system already discussed, a typical rotor can be broken down into several discrete components. Therefore, before going any further, it's once again necessary to define the terminology.

Friction Disc

The *friction disc* is essentially the working component of the brake rotor. It's responsible for providing a mating friction surface for the brake pads, as well as supplying the thermal mass necessary for thermal energy absorption. Consequently, the friction disc experiences the highest operating tempera-



The friction disc is where all the action takes place. Because of its ideal mechanical properties and reasonable cost, gray cast iron is the predominant material of choice for nearly every friction disc today. The hazy film shown covering this friction disc is a coating to prevent corrosion before installation. (Randall Shafer/StopTech)

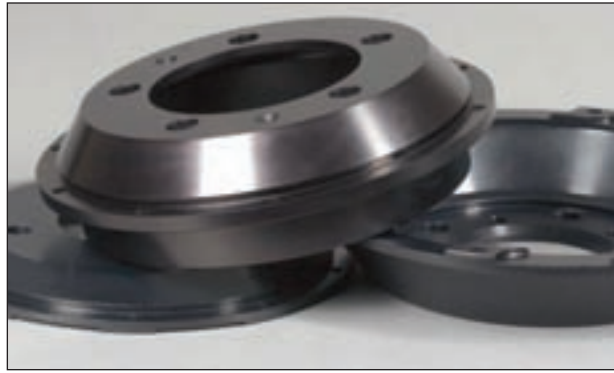

The rotor hat couples the friction disc to the wheel hub. In many production vehicle applications, it's integral to the friction disc, but in high-performance applications, it may be a separate component. The hats shown here are machined from billet aluminum in order to reduce rotating inertia. (Randall Shafer/StopTech)

tures of any brake system component.

Friction discs are usually made from cast iron due to its inherent strength, energy absorption characteristics, and temperature robustness. Other materials can be used in select racing applications (more to come on this topic later in this chapter), but when comparing cost to performance, cast iron simply can't be beat.

Rotor Hat

The rotor *hat*, also known as the *mounting bell*, serves to locate and attach the friction disc to the vehicle's wheel hub or spindle. In doing so, the torque generated in the friction disc is transferred by the hat to the hub, through the wheel, and ultimately to the tire contact patch.

The rotor hat can either be integral to the friction disc, or it can be a separate component assembled to the friction disc. In either case, the hat also provides the primary mechanical heat transfer path from the friction disc to other vehicle components at the wheel end.



In the quest to further reduce rotating inertia, it's possible to use rotor hats made from exotic alloys. The hat shown above (already attached to a friction disc) was machined from a magnesium alloy. While cost prohibitive, it provides the lightest rotor assembly possible. (Randall Shafer)

Integral rotor hats are made from the same material as the friction disc—cast iron in most cases. Discrete rotor hats can be made from a variety of materials, with aluminum alloys being the most common due to their low weight and relatively modest cost. In more exotic applications magnesium alloys can be employed, but these are beyond the budget of most automotive enthusiasts.



Two-piece rotors allow for relative movement between the friction disc and hat at temperature. Specialized fasteners are used to provide this freedom while simultaneously transmitting thousands of foot-pounds of brake torque. (Randall Shafer/StopTech)



Since most rotor hat mounting methods allow for some unrestricted axial motion, they may rattle around when cold. Although not present on the racing rotor shown, anti-rattle springs are typically employed on street applications. (Randall Shafer)